


DECORATIVE

ABU DHABI

Decorative fabric with a natural speckled appearance

COLOUR 000000G2 City Shadow

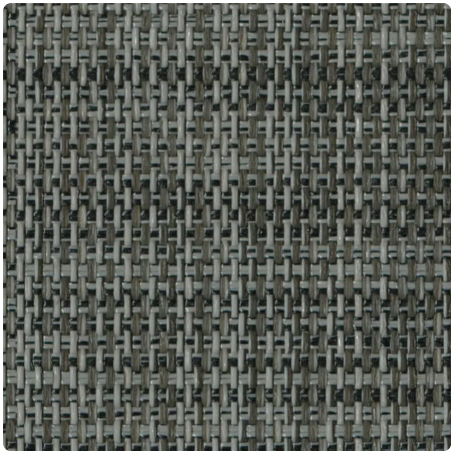

WIDTH(S)	300 cm
DENSITY	3%
VISUAL COMFORT - CITY SHADOW	
Glare control	1
View through	2
Privacy	2
Daylight	1
THERMAL COMFORT WITH GLAZING F	
Class interior	
THERMAL AND VISUAL PROPERTIES	
Solar Reflectance Rs	13,2%
Solar Transmittance Ts	4,5%
Interior g-tot - Glazing F	0,550
Visual Transmittance Tv	0,038
Diffuse Visual Transmittance Tv _{n-dif}	0,005
Direct Visual Transmittance Tv _{n-n}	0,033

ABOUT THIS RANGE



Enhance your interior with our decorative fabrics featuring unique designs. Add personality and create an exclusive atmosphere that reflects your distinctive style. Choose from our collection to redefine your space.

ABU DHABI

- ✓ Contributes to a room's thermal and visual comfort
- ✓ Extra wide width for seamless covers
- ✓ Distinctive decorative fabric with varying-toned yarn
- ✓ Brings a novel atmosphere to a space
- ✓ Keep vision toward the outside with dark colours

TECHNICAL DATA

GENERAL FABRIC PROPERTIES

	Average value	Standard
Weighted composition	24% Polyester - 76% PVC	
Weaving pattern	Natté	
Width(s)	300 cm	
Roll length (nominal)	Rolls of 30 lm	
Surface mass (weight)	456 g/m² ± 5%	ISO 2286-2
Thickness	0.69 mm ± 5%	ISO 2286-3

MECHANICAL PROPERTIES

	Average value	Standard
Breaking strength - Warp	>155 daN/5 cm	ISO 1421
Breaking strength - Weft	>145 daN/5 cm	ISO 1421
Elongation at break - Warp	<33%	ISO 1421
Elongation at break - Weft	<24%	ISO 1421
Tear strength - Warp	≥15 daN	ISO 4674-1 method 2
Tear strength - Weft	≥11 daN	ISO 4674-1 method 2

FIRE CERTIFICATES

		Standard
European Union - Spain	Class 1	EN 13773
France	M2	NF P 92-507
Germany	B1	DIN 4102-1
Italy	Classe Uno	UNI 9177
United States	FR	NFPA 701

THERMAL AND VISUAL PROPERTIES

Thermal properties

Solar Transmittance Ts (%)	4,5
Solar Reflectance Rs (%)	13,2
Solar Absorptance As (%)	82,3

Visual properties

Direct Visual Transmittance Tv _{n-n}	0,033
Diffuse Visual Transmittance Tv _{n-dif}	0,005
Diffuse Hemispherical Transmittance Tv _{dif-h}	0,029
Visual Transmittance Tv	0,038
Daylight	1
Glare control	1
Privacy	2
View through	2
UV Protection (Suv Class)	3

Thermal factors	Average value	Class
G _{tot} Glazing F	0,550	0
G _{tot} Glazing G	0,290	2
G _{tot} Glazing H	0,460	1

HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



Fire retardant



Greenguard Gold