
DECORATIVE

ABU DHABI

Decorative fabric with a natural speckled appearance

COLOUR 00000BN2 Cherry Pipper

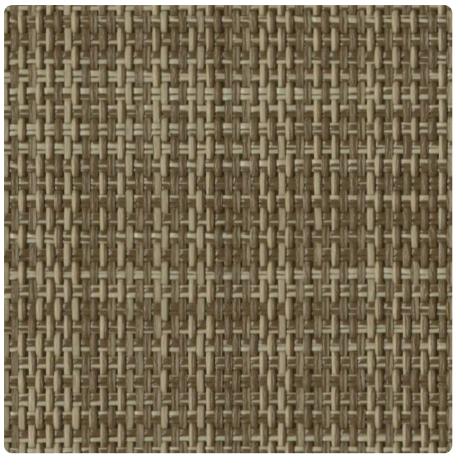

WIDTH(S)	300 cm
DENSITY	3%

VISUAL COMFORT - CHERRY PIPPER

Glare control	1
View through	2
Privacy	2
Daylight	1

THERMAL COMFORT WITH GLAZING F

Class interior

THERMAL AND VISUAL PROPERTIES

Solar Reflectance Rs	17,1%
Solar Transmittance Ts	5,5%
Interior g-tot - Glazing F	0,540
Visual Transmittance Tv	0,043
Diffuse Visual Transmittance Tvn-dif	0,009
Direct Visual Transmittance Tvn-n	0,034

ABOUT THIS RANGE



Enhance your interior with our decorative fabrics featuring unique designs. Add personality and create an exclusive atmosphere that reflects your distinctive style. Choose from our collection to redefine your space.

ABU DHABI

- Contributes to a room's thermal and visual comfort
- Extra wide width for seamless covers
- Distinctive decorative fabric with varying-toned yarn
- Brings a novel atmosphere to a space
- Keep vision toward the outside with dark colours

TECHNICAL DATA

GENERAL FABRIC PROPERTIES

	Average value	Standard
Weighted composition	24% Polyester - 76% PVC	
Weaving pattern	Natté	
Width(s)	300 cm	
Roll length (nominal)	Rolls of 30 lm	
Surface mass (weight)	456 g/m² ± 5%	ISO 2286-2
Thickness	0.69 mm ± 5%	ISO 2286-3

MECHANICAL PROPERTIES

	Average value	Standard
Breaking strength - Warp	>155 daN/5 cm	ISO 1421
Breaking strength - Weft	>145 daN/5 cm	ISO 1421
Elongation at break - Warp	<33%	ISO 1421
Elongation at break - Weft	<24%	ISO 1421
Tear strength - Warp	≥15 daN	ISO 4674-1 method 2
Tear strength - Weft	≥11 daN	ISO 4674-1 method 2

FIRE CERTIFICATES

		Standard
European Union - Spain	Class 1	EN 13773
France	M2	NF P 92-507
Germany	B1	DIN 4102-1
Italy	Classe Uno	UNI 9177
United States	FR	NFPA 701

THERMAL AND VISUAL PROPERTIES

Thermal properties		
Solar Transmittance Ts (%)	5,5	
Solar Reflectance Rs (%)	17,1	
Solar Absorptance As (%)	77,4	
Visual properties		
Direct Visual Transmittance Tvn-n	0,034	
Diffuse Visual Transmittance Tvn-dif	0,009	
Diffuse Hemispherical Transmittance Tvdif-h	0,033	
Visual Transmittance Tv	0,043	
Daylight	1	
Glare control	1	
Privacy	2	
View through	2	
UV Protection (Suv Class)	3	
Thermal factors	Average value	Class
Gtot Glazing F	0,540	0
Gtot Glazing G	0,280	2
Gtot Glazing H	0,450	1

HEALTH, SAFETY AND OTHER PROPERTIES

5

Warranty

Printable

Fire retardant

GREENGUARD GOLD

Greenguard Gold