


DARKENING

# FLOCKÉ

Darkening fabric with an elegant design

COLOUR 00000609 Loutre (Side A)

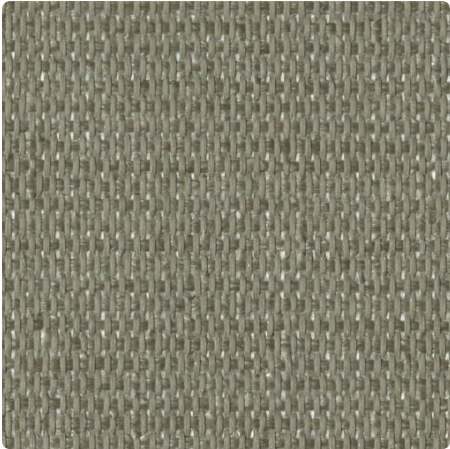

|                                      |        |
|--------------------------------------|--------|
| WIDTH(S)                             | 240 cm |
| DENSITY                              | 0%     |
| VISUAL COMFORT - LOUTRE (SIDE A)     |        |
| Glare control                        | 4      |
| View through                         | 0      |
| Privacy                              | 4      |
| Daylight                             | 0      |
| THERMAL COMFORT WITH GLAZING F       |        |
| Class interior                       | 1      |
| THERMAL AND VISUAL PROPERTIES        |        |
| Solar Reflectance Rs                 | 27,9%  |
| Solar Transmittance Ts               | 0,0%   |
| Interior g-tot - Glazing F           | 0,494  |
| Visual Transmittance Tv              | 0,000  |
| Diffuse Visual Transmittance Tvn-dif | 0,000  |
| Direct Visual Transmittance Tvn-n    | 0,000  |

# ABOUT THIS RANGE



Discover a broad selection of fabrics tailored to optimise both darkening and privacy in a space. Our versatile range offers customizable solutions, ensuring a perfect blend of functionality and style for your unique preferences.

## FLOCKÉ

- ✓ Elegant textile-like appearance
- ✓ Made from fiberglass
- ✓ Exceptional dimensional stability
- ✓ Elevated thermal comfort thanks to its special white acrylic coating facing the window
- ✓ Stylish fabric, 8 trendy colours

# TECHNICAL DATA

## GENERAL FABRIC PROPERTIES

|                                                  | Average value                                      | Standard    |
|--------------------------------------------------|----------------------------------------------------|-------------|
| Weighted composition                             | 44% Fibreglass fabric - 56% Acrylic cotton backing |             |
| Width(s)                                         | 240 cm                                             |             |
| Roll length (nominal)                            | Rolls of 33 lm                                     |             |
| Surface mass (weight)                            | 550 g/m <sup>2</sup> ± 10%                         | ISO 2286-2  |
| Thickness                                        | 0.52 mm ± 10%                                      | ISO 2286-3  |
| Colour fastness to artificial light (scale of 8) | ≥ 7/8 (white not graded)                           | ISO 105 B02 |
| Acoustic properties (αw)                         | 0.15                                               | ISO 10534-2 |

## MECHANICAL PROPERTIES

|                            | Average value | Standard            |
|----------------------------|---------------|---------------------|
| Breaking strength - Warp   | >120 daN/5 cm | ISO 1421            |
| Breaking strength - Weft   | >70 daN/5 cm  | ISO 1421            |
| Elongation at break - Warp | <5%           | ISO 1421            |
| Elongation at break - Weft | <5%           | ISO 1421            |
| Tear strength - Warp       | ≥6 daN        | ISO 4674-1 method 2 |
| Tear strength - Weft       | ≥5 daN        | ISO 4674-1 method 2 |

# FIRE CERTIFICATES

|                        |            | Standard          |
|------------------------|------------|-------------------|
| European Union - Spain | Class 1    | EN 13773          |
| France                 | M1         | NF P 92-507       |
| Germany                | B1         | DIN 4102-1        |
| Italy                  | Classe Uno | UNI 9177          |
| United Kingdom         | Class 0    | BS 476 part 6 & 7 |
| United States          | FR         | NFPA 701          |

# THERMAL AND VISUAL PROPERTIES

## Thermal properties

|                            |      |
|----------------------------|------|
| Solar Transmittance Ts (%) | 0,0  |
| Solar Reflectance Rs (%)   | 27,9 |
| Solar Absorptance As (%)   | 72,1 |

## Visual properties

|                                                         |       |
|---------------------------------------------------------|-------|
| Direct Visual Transmittance Tv <sub>n-n</sub>           | 0,000 |
| Diffuse Visual Transmittance Tv <sub>n-dif</sub>        | 0,000 |
| Diffuse Hemispherical Transmittance Tv <sub>dif-h</sub> | 0,000 |
| Visual Transmittance Tv                                 | 0,000 |
| Daylight                                                | 0     |
| Glare control                                           | 4     |
| Privacy                                                 | 4     |
| View through                                            | 0     |
| UV Protection (Suv Class)                               | 4     |

| Thermal factors            | Average value | Class |
|----------------------------|---------------|-------|
| G <sub>tot</sub> Glazing F | 0,494         | 1     |
| G <sub>tot</sub> Glazing G | 0,253         | 2     |
| G <sub>tot</sub> Glazing H | 0,418         | 1     |

# HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



Antibacterial



Fire retardant



Made in EU



PVC free