


MERMET

DARKENING FLOCKÉ

Darkening fabric with an elegant design

COLOUR 00000618 Mississippi (Side B - White backing)

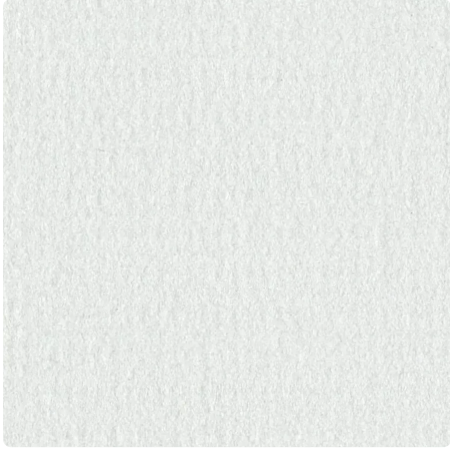

WIDTH(S)	240 cm
DENSITY	0%
VISUAL COMFORT - MISSISSIPPI (SIDE B - WHITE BACKING)	
Glare control	4
View through	0
Privacy	4
Daylight	0
THERMAL COMFORT WITH GLAZING F	
Class interior	2
THERMAL AND VISUAL PROPERTIES	
Solar Reflectance Rs	69,5%
Solar Transmittance Ts	0,0%
Interior g-tot - Glazing F	0,260
Visual Transmittance Tv	0,000
Diffuse Visual Transmittance Tv _{n-dif}	0,000
Direct Visual Transmittance Tv _{n-n}	0,000

ABOUT THIS RANGE



Discover a broad selection of fabrics tailored to optimise both darkening and privacy in a space. Our versatile range offers customizable solutions, ensuring a perfect blend of functionality and style for your unique preferences.

FLOCKÉ

- ✓ Elegant textile-like appearance
- ✓ Made from fiberglass
- ✓ Exceptional dimensional stability
- ✓ Elevated thermal comfort thanks to its special white acrylic coating facing the window
- ✓ Stylish fabric, 8 trendy colours

TECHNICAL DATA

GENERAL FABRIC PROPERTIES

	Average value	Standard
Weighted composition	44% Fibreglass fabric - 56% Acrylic cotton backing	
Width(s)	240 cm	
Roll length (nominal)	Rolls of 33 lm	
Surface mass (weight)	550 g/m ² ± 10%	ISO 2286-2
Thickness	0.52 mm ± 10%	ISO 2286-3
Colour fastness to artificial light (scale of 8)	≥ 7/8 (white not graded)	ISO 105 B02
Acoustic properties (αw)	0.15	ISO 10534-2

MECHANICAL PROPERTIES

	Average value	Standard
Breaking strength - Warp	>120 daN/5 cm	ISO 1421
Breaking strength - Weft	>70 daN/5 cm	ISO 1421
Elongation at break - Warp	<5%	ISO 1421
Elongation at break - Weft	<5%	ISO 1421
Tear strength - Warp	≥6 daN	ISO 4674-1 method 2
Tear strength - Weft	≥5 daN	ISO 4674-1 method 2

FIRE CERTIFICATES

		Standard
European Union - Spain	Class 1	EN 13773
France	M1	NF P 92-507
Germany	B1	DIN 4102-1
Italy	Classe Uno	UNI 9177
United Kingdom	Class 0	BS 476 part 6 & 7
United States	FR	NFPA 701

THERMAL AND VISUAL PROPERTIES

Thermal properties

Solar Transmittance Ts (%)	0,0
Solar Reflectance Rs (%)	69,5
Solar Absorptance As (%)	30,5

Visual properties

Direct Visual Transmittance Tv _{n-n}	0,000
Diffuse Visual Transmittance Tv _{n-dif}	0,000
Diffuse Hemispherical Transmittance Tv _{dif-h}	0,000
Visual Transmittance Tv	0,000
Daylight	0
Glare control	4
Privacy	4
View through	0
UV Protection (Suv Class)	4

Thermal factors	Average value	Class
G _{tot} Glazing F	0,260	2
G _{tot} Glazing G	0,111	3
G _{tot} Glazing H	0,238	2

HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



Antibacterial



Fire retardant



Made in EU



PVC free