


## DECORATIVE

# PANAMA DECO

Very decorative fabric with a natural woven wood design

**COLOUR** 0007M034 Skarn

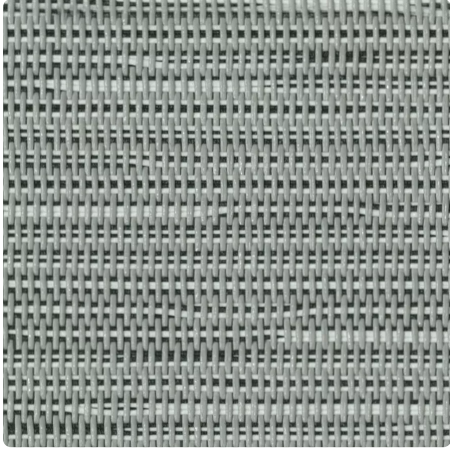

|                                       |        |
|---------------------------------------|--------|
| <b>WIDTH(S)</b>                       | 310 cm |
| <b>DENSITY</b>                        | 3%     |
| <b>VISUAL COMFORT - SKARN</b>         |        |
| Glare control                         | 3      |
| View through                          | 2      |
| Privacy                               | 2      |
| Daylight                              | 1      |
| <b>THERMAL COMFORT WITH GLAZING F</b> |        |
| Class interior                        | 1      |
| <b>THERMAL AND VISUAL PROPERTIES</b>  |        |
| Solar Reflectance Rs                  | 27,6%  |
| Solar Transmittance Ts                | 5,9%   |
| Interior g-tot - Glazing F            | 0,480  |
| Visual Transmittance Tv               | 0,047  |
| Diffuse Visual Transmittance Tvn-dif  | 0,024  |
| Direct Visual Transmittance Tvn-n     | 0,023  |

# ABOUT THIS RANGE



Enhance your interior with our decorative fabrics featuring unique designs. Add personality and create an exclusive atmosphere that reflects your distinctive style. Choose from our collection to redefine your space.

## PANAMA DECO

- ✓ Optimal glare control classification with dark colours
- ✓ Pattern inspired by nature
- ✓ Soothing colour palette
- ✓ Extra wide width for seamless covers
- ✓ Easy on the eyes and cosy

# TECHNICAL DATA

## GENERAL FABRIC PROPERTIES

|                                                  | Average value            | Standard    |
|--------------------------------------------------|--------------------------|-------------|
| Weighted composition                             | 36% Fibreglass - 64% PVC |             |
| Weaving pattern                                  | Natté                    |             |
| Width(s)                                         | 310 cm                   |             |
| Roll length (nominal)                            | Rolls of 22 lm           |             |
| Surface mass (weight)                            | 516 g/m² ± 5%            | ISO 2286-2  |
| Thickness                                        | 0.7 mm ± 5%              | ISO 2286-3  |
| Colour fastness to artificial light (scale of 8) | ≥ 7/8 (white not graded) | ISO 105 B02 |

## MECHANICAL PROPERTIES

|                            | Average value | Standard            |
|----------------------------|---------------|---------------------|
| Breaking strength - Warp   | >220 daN/5 cm | ISO 1421            |
| Breaking strength - Weft   | >220 daN/5 cm | ISO 1421            |
| Elongation at break - Warp | <7%           | ISO 1421            |
| Elongation at break - Weft | <3%           | ISO 1421            |
| Tear strength - Warp       | ≥8 daN        | ISO 4674-1 method 2 |
| Tear strength - Weft       | ≥3 daN        | ISO 4674-1 method 2 |

# FIRE CERTIFICATES

|                        |         | Standard    |
|------------------------|---------|-------------|
| European Union - Spain | Class 1 | EN 13773    |
| France                 | M2      | NF P 92-507 |
| United States          | FR      | NFPA 701    |

# THERMAL AND VISUAL PROPERTIES

## Thermal properties

|                            |      |
|----------------------------|------|
| Solar Transmittance Ts (%) | 5,9  |
| Solar Reflectance Rs (%)   | 27,6 |
| Solar Absorptance As (%)   | 66,5 |

## Visual properties

|                                                         |       |
|---------------------------------------------------------|-------|
| Direct Visual Transmittance Tv <sub>n-n</sub>           | 0,023 |
| Diffuse Visual Transmittance Tv <sub>n-dif</sub>        | 0,024 |
| Diffuse Hemispherical Transmittance Tv <sub>dif-h</sub> | 0,037 |
| Visual Transmittance Tv                                 | 0,047 |
| Daylight                                                | 1     |
| Glare control                                           | 3     |
| Privacy                                                 | 2     |
| View through                                            | 2     |

|                            |               |       |
|----------------------------|---------------|-------|
| UV Protection (Suv Class)  | 3             |       |
| Thermal factors            | Average value | Class |
| G <sub>tot</sub> Glazing F | 0,480         | 1     |
| G <sub>tot</sub> Glazing G | 0,250         | 2     |
| G <sub>tot</sub> Glazing H | 0,410         | 1     |

# HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



Fire retardant



Made in EU



Greenguard Gold