


ESSENTIALS

SCREEN VISION 3

Basket weave fabric combining visual and thermal comfort

COLOUR 00030001 Black Grey

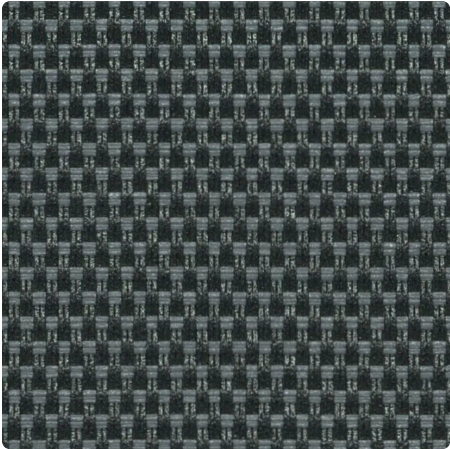

WIDTH(S)	200, 250, 320 cm
DENSITY	3%
VISUAL COMFORT - BLACK GREY	
Glare control	1
View through	2
Privacy	2
Daylight	1
THERMAL COMFORT WITH GLAZING F	
Class interior	
THERMAL AND VISUAL PROPERTIES	
Solar Reflectance Rs	8,1%
Solar Transmittance Ts	4,1%
Interior g-tot - Glazing F	0,575
Visual Transmittance Tv	0,041
Diffuse Visual Transmittance Tvn-dif	0,005
Direct Visual Transmittance Tvn-n	0,036

ABOUT THIS RANGE



Discover our top-rated interior solar shading fabrics: Unmatched quality, proven performance, and widely acclaimed as the most popular choice. Elevate your space with superior solutions!

SCREEN VISION 3

- ✓ Basket weave fabric that combines visual comfort with transparency
- ✓ Good glare control with dark colours
- ✓ Optimum thermal comfort with light colours
- ✓ 3 other densities to enhance solar shading based on building orientation
- ✓ Economical: 3 width sizes (up to 320cm) to reduce waste in the manufacturing of fabric panels

TECHNICAL DATA

GENERAL FABRIC PROPERTIES

	Average value	Standard
Weighted composition	36% Fibreglass - 64% PVC	
Weaving pattern	Natté 2x2	
Width(s)	200, 250, 320 cm	
Roll length (nominal)	Rolls of 33 lm	
Surface mass (weight)	385 g/m² ± 5%	ISO 2286-2
Thickness	0.48 mm ± 5%	ISO 2286-3
Colour fastness to artificial light (scale of 8)	≥ 7/8 (white not graded)	ISO 105 B02

MECHANICAL PROPERTIES

	Average value	Standard
Breaking strength - Warp	>180 daN/5 cm	ISO 1421
Breaking strength - Weft	>100 daN/5 cm	ISO 1421
Elongation at break - Warp	<5%	ISO 1421
Elongation at break - Weft	<5%	ISO 1421
Tear strength - Warp	≥5 daN	ISO 4674-1 method 2
Tear strength - Weft	≥3 daN	ISO 4674-1 method 2

FIRE CERTIFICATES

		Standard
France	M1	NF P 92-507
Germany	B1	DIN 4102-1
Italy	Classe Uno	UNI 9177
United Kingdom	Class 0	BS 476 part 6 & 7
United Kingdom	Type B	BS 5867 part 2
United States	FR	NFPA 701

THERMAL AND VISUAL PROPERTIES

Thermal properties

Solar Transmittance Ts (%)	4,1
Solar Reflectance Rs (%)	8,1
Solar Absorptance As (%)	87,7

Visual properties

Direct Visual Transmittance Tv _{n-n}	0,036
Diffuse Visual Transmittance Tv _{n-dif}	0,005
Diffuse Hemispherical Transmittance Tv _{dif-h}	0,031
Visual Transmittance Tv	0,041
Daylight	1
Glare control	1
Privacy	2
View through	2
UV Protection (Suv Class)	2

Thermal factors	Average value	Class
G _{tot} Glazing F	0,575	0
G _{tot} Glazing G	0,299	2
G _{tot} Glazing H	0,483	1

HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



Antibacterial



Fire retardant



Made in EU

