


EVOLUTION

ULTERIO 3

Screens made from ecological materials

COLOUR 00870087 Plum Slate

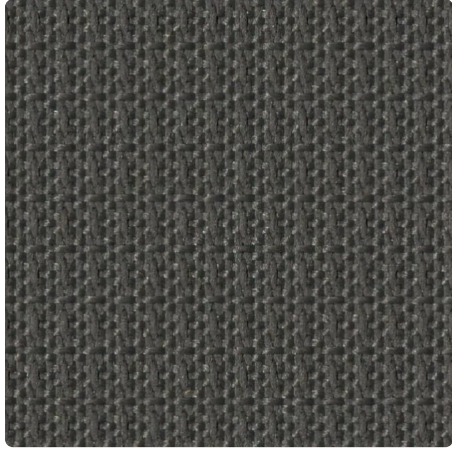

WIDTH(S)	250, 320 cm
-----------------	-------------

DENSITY	3%
----------------	----

VISUAL COMFORT - PLUM SLATE

Glare control	1
View through	2
Privacy	2
Daylight	1

THERMAL COMFORT WITH GLAZING F

Class interior	
----------------	--

THERMAL AND VISUAL PROPERTIES

Solar Reflectance Rs	31,9%
Solar Transmittance Ts	17,6%
Interior g-tot - Glazing F	0,520
Visual Transmittance Tv	0,044
Diffuse Visual Transmittance Tvn-dif	0,011
Direct Visual Transmittance Tvn-n	0,033

ABOUT THIS RANGE



Embrace the future sustainably with our next-generation fabrics. Engineered for innovation, designed for tomorrow's sustainable living.

ULTERIO 3

- ✓ Slim and sophisticated fabric, effortlessly adaptable for use in compact-sized headboxes
- ✓ Created from recycled PET bottles, free from PVC
- ✓ Meeting diverse environmental standards
- ✓ Bacteria have minimal chances of survival on this fabric due to its properties
- ✓ Expanded widths (up to 320 cm) eliminating the need for welding

TECHNICAL DATA

GENERAL FABRIC PROPERTIES

	Average value	Standard
Weighted composition	100% recycled PET bottles	
Weaving pattern	Knitted	
Width(s)	250, 320 cm	
Roll length (nominal)	Rolls of 30 lm	
Surface mass (weight)	223 g/m² ± 5%	ISO 2286-2
Thickness	0.5 mm ± 5%	ISO 2286-3
Colour fastness to artificial light (scale of 8)	≥ 2/8 (white not graded)	ISO 105 B02
Acoustic properties (αw)	0.25	ISO 10534-2

MECHANICAL PROPERTIES

	Average value	Standard
Breaking strength - Warp	>135 daN/5 cm	ISO 1421
Breaking strength - Weft	>118 daN/5 cm	ISO 1421
Elongation at break - Warp	<26%	ISO 1421
Elongation at break - Weft	<26%	ISO 1421
Tear strength - Warp	≥13 daN	ISO 4674-1 method 2
Tear strength - Weft	≥13 daN	ISO 4674-1 method 2

FIRE CERTIFICATES

		Standard
Euroclass	B-s1,d0	EN 13501-1
European Union - Spain	Class 1	EN 13773
France	M1	NF P 92-507
Germany	B1	DIN 4102-1
Italy	Classe Uno	UNI 9177
United Kingdom	Type C	BS 5867 part 2
United States	FR	NFPA 701

THERMAL AND VISUAL PROPERTIES

Thermal properties

Solar Transmittance Ts (%)	17,6
Solar Reflectance Rs (%)	31,9
Solar Absorptance As (%)	50,5

Visual properties

Direct Visual Transmittance Tv _{n-n}	0,033
Diffuse Visual Transmittance Tv _{n-dif}	0,011
Diffuse Hemispherical Transmittance Tv _{dif-h}	0,034
Visual Transmittance Tv	0,044
Daylight	1
Glare control	1
Privacy	2
View through	2

UV Protection (Suv Class)	2	
Thermal factors	Average value	Class
Gtot Glazing F	0,520	0
Gtot Glazing G	0,300	2
Gtot Glazing H	0,450	1

HEALTH, SAFETY AND OTHER PROPERTIES



Warranty



Printable



PVC free



Fire retardant



Made in EU



Greenguard Gold



Cradle to Cradle Bronze



Oeko-Tex